

20KW EMERGENCY STATIONARY DIESEL POWER GENERATOR

*Featuring a
Kubota V2203-BG
Diesel Engine*



Photo: Enclosed unit. See reverse side for open unit.

- *Designed for unlimited emergency power usage (limited to 100 hours annually for non-emergency and maintenance use)*
- *Compliant with EPA Emergency Stationary ICE Standards*
- *Rugged, heavy duty design and construction for dependable performance and long product life*
- *Quiet and smooth running*
- *Easy installation hook-ups*
- *Also available in 40kW size*

20kW Emergency Stationary Enclosed and Open Generators (40kW Models Also Available)


These generators are designed for unlimited emergency power usage, and limited to 100 hours per year for non-emergency and maintenance use. EPA regulations require permanent installation in a stationary location. These units may not be used in mobile applications.

Please refer to the Installation & Maintenance Manual for additional information.

Standard Features

- 2-wire start
- On-board battery and cables
- Battery charger
- 11-gauge steel construction
- 2-step powder-coated paint
- Non-corrosive aluminum doors
- Coolant heater
- Standard muffler

Various options available – call for details.

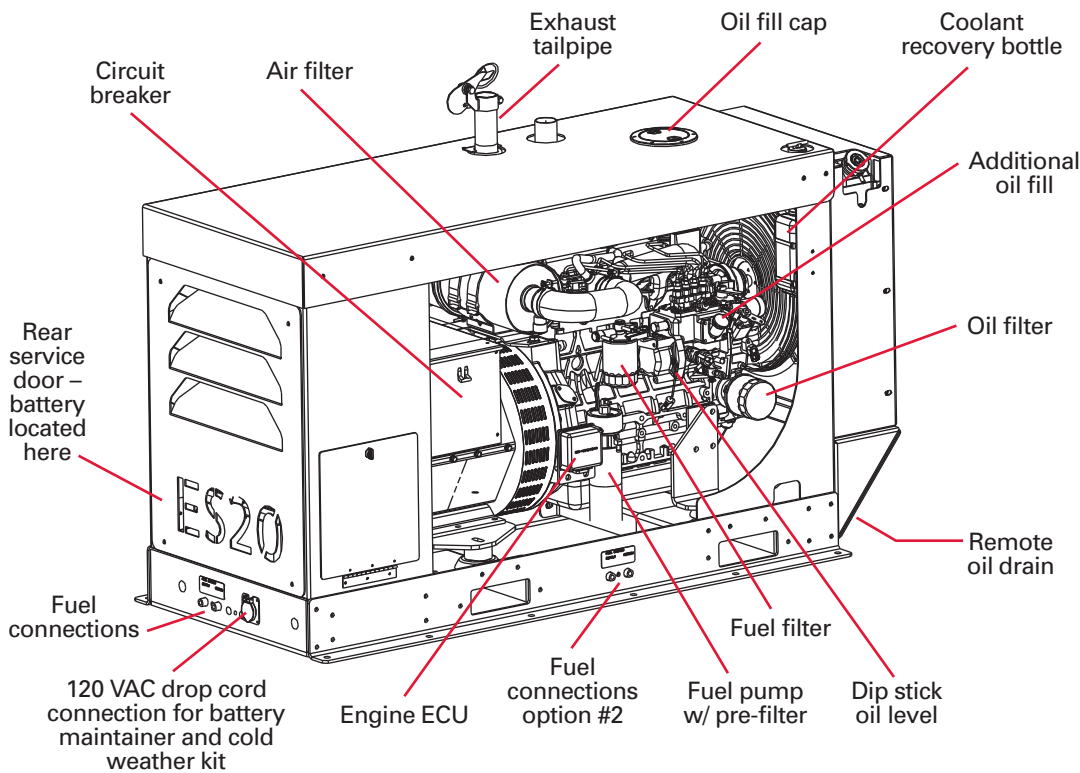

Specifications

KW (Stand-by)	20.0
KW (Continuous)	18.2
Volts Single Phase	120 / 240
Frequency	60hz
120/240 V Cont. Amps	152 / 76
Engine Kubota	V2203 BG
Fuel Cons. 25% Load	0.61 US Gal/hr.
Fuel Cons. 50% Load	0.97 US Gal/hr.
Fuel Cons. Full Load	1.58 US Gal/hr.
Weight (w/oil & antifreeze)	1,278 lbs.
Length	57.52 in.
Width	27.00 in.
Height	37.39 in.



All unit ratings are established at 1.0 power factor, 68° F and 500 ft. above sea level. De-rate unit by 3.5% for every 1000 ft. above 500 ft. and 1% for every 10° F above 68° F. Specifications subject to change without notice. © 2021, EPS.